



MANAGEMENT SERVICES DEPARTMENT
PURCHASING DIVISION
241 W. South Street
Kalamazoo, Michigan 49007-4796
Telephone (269) 337-8020
FAX (269) 337-8500
cokpurchasing@kalamazoo.org

ADDENDUM #3
July 26, 2023

TO: ALL Prospective Bidders
PROJECT: Truck Scale & Cover Building
BID REFERENCE #: 90900-013.0
BID OPENING DATE/TIME: August 3, 2023 @ 3:00 p.m. Local Time (ET)

The purpose of this addendum is to clarify and/or modify the Drawings and/or Specifications for this project. All work affected is subject to all applicable terms and conditions of the Bidding and Contract Documents.

- 1. NOTE: NEW BID DUE/OPENING DATE/TIME: Thursday, August 3, 2023 @ 3:00 p.m. Local Time.
2. QUESTIONS AND ANSWERS provided by Tower Pinkster – See Attachment #1

Questions related to this addendum may be addressed to Chris Nelson Collections & Plant Maintenance Manager at nelsonc1@kalamazoo.org.

The Addendum can be viewed and downloaded from the City's website at https://www.kalamazoo.org/bidopportunities.

In order for a bid to be responsive, this signed and dated addendum must be returned with your bid. If you have already submitted your bid, acknowledge receipt and acceptance of this addendum by signing in the place provided and returning it to the undersigned and it shall be incorporated in your bid. Please identify your return envelope with the bid reference number and project description.

Sincerely,

Michelle Emig
Purchasing Division Manager

c: Chris Nelson, Public Services
Prevailing Wage File

FIRM: _____
NAME: _____

SIGNED: _____
DATE: _____

(Type or Print)



ADDENDUM #3

Attachment A
Questions & Answers

Truck Scale & Building Cover

Bid Reference #: 90900-013.0

July 2023

7.25.2023

BID QUESTIONS

KALAMAZOO TRUCK SCALE AND BUILDING ENCLOSURE

Bid Questions

Answers are **RED**


1. Pg A101 calls for "all exposed pre-engineered components and galvanized steel components" to be painted. Are the building components all to be galvanized and then painted?
 - a. **Answer: YES.**

2. Does the interior electrical work also have to be painted?
 - a. **Answer: No.**

3. Spec section 26 0543-7, note H.12 calls for concrete warning planks buried above the duct bank. Are the planks installed in addition to the underground marking tape?
 - a. **Answer: Yes.**

4. What PSI is the duct bank concrete?
 - a. **Answer: 4,000 PSI.**

5. Can we get more information on the trench drain needed beneath the truck scale? I called & spoke with Mettler Toledo to see if there's a specific trench that they require/prefer beneath the scale & their representative said that they do not have any say or input as to what type of trench drain is needed.
 - a. **Answer: Our recommendation for the trench drain is 24 lengths (1 meter each - units SK2-7 - SK2-30) of the ACO 200k power drain with an SK2-0303 at the end, (the total length of the trench is about 24.5 m) using the 6" knockout in the bottom of the 0303 to direct the 6" pipe to the south.**
Things I noticed in the plans: The scale and scale foundation are listed as "by others", so I don't know if that will interfere with this drain. The column and wall foundations don't interfere, though. The guardrail around the scale is also by others. The foundation of those shouldn't impact the power drain, though - Hurley & Stewart.

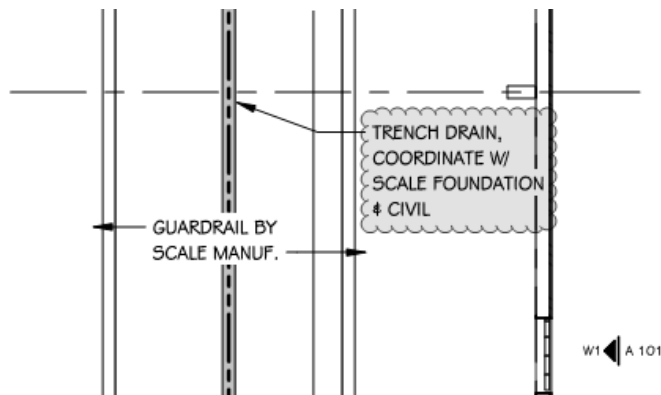

6. There aren't any plumbing drawings showing where this trench drains discharges to?
 - a. **Answer: The trench drain will tie into Manhole KT10017 located west of the cover building approximately 70 feet. Use SDR 35 pipe at 0.4% Grade.**